

3510

35x35x10MM



General Specifications


- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1571AWG#28 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, IP54

Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m ³ /min	Inch-H ₂ O	Pa	dB-A	g
DA03510#05H	F01	B.S	5	3.5~5.5	0.25	1.25	8000	6.20	0.18	0.15	37.07	29.8	10.0
DA03510#05M	F01	B.S	5	3.5~5.5	0.18	0.90	6000	4.46	0.13	0.08	20.86	23.5	10.0
DA03510#05L	F01	B.S	5	3.5~5.5	0.12	0.60	4000	2.79	0.08	0.04	9.53	21.0	10.0
DA03510#12H	F01	B.S	12	7.0~13.8	0.18	2.16	10000	7.51	0.21	0.21	52.20	34.5	10.0
DA03510#12M	F01	B.S	12	7.0~13.8	0.14	1.68	8000	6.20	0.18	0.15	37.07	29.8	10.0
DA03510#12L	F01	B.S	12	7.0~13.8	0.10	1.20	6000	4.46	0.13	0.08	20.86	23.5	10.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

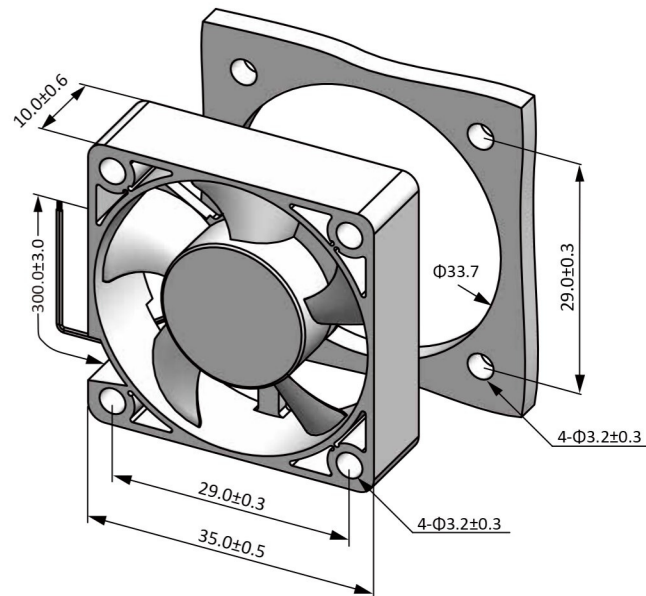

PQ Curve (At Rated Voltage)

