

5025

50x50x25MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM,IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA05025#12H	F01	B.S	12	7.0~13.8	0.22	2.64	6000	19.79	0.56	0.22	55.38	37.8	35.0
DA05025#12M	F01	B.S	12	7.0~13.8	0.16	1.92	5000	16.06	0.45	0.15	36.43	31.8	35.0
DA05025#12L	F01	B.S	12	7.0~13.8	0.12	1.44	4000	11.65	0.33	0.10	24.62	27.0	35.0
DA05025#12D	F01	B.S	12	7.0~13.8	0.08	0.96	3000	8.29	0.23	0.06	15.28	23.0	35.0
DA05025#24H	F01	B.S	24	14.0~27.6	0.17	4.08	6000	19.79	0.56	0.22	55.38	37.8	35.0
DA05025#24M	F01	B.S	24	14.0~27.6	0.11	2.64	5000	15.80	0.45	0.14	35.27	31.8	35.0
DA05025#24L	F01	B.S	24	14.0~27.6	0.09	2.16	4000	11.65	0.33	0.10	24.62	27.0	35.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

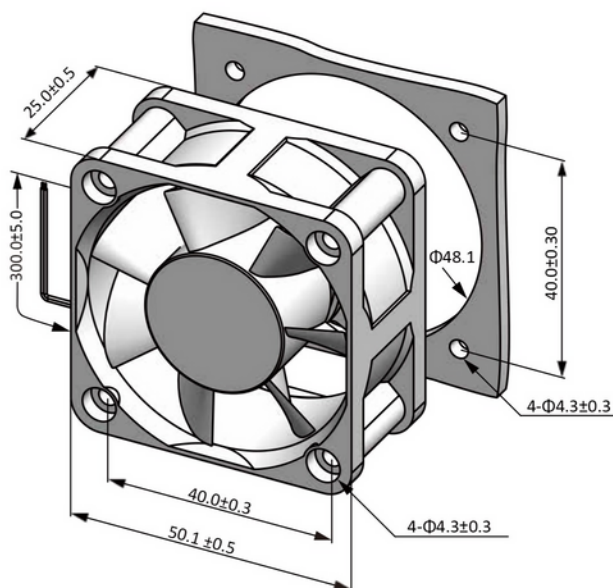

PQ Curve (At Rated Voltage)

