

5015-B

51x52x15MM

General Specifications

Material	Expected Life	Temperature Range	Safety Standards	DC Fan Specials	IP Class
Frame: Plastic (UL94V-0) Impeller: Plastic (UL94V-0) Lead Wire: UL1007AWG#26 or Equivalent (+) Red, (-) Black	Ball Bearing 70,000hrs (40°C)	Operating Temperature -10°C~70°C (Non-condensing) Storage Temperature -40°C~70°C (Non-condensing)	UL, TUV, CE	RD, FG, PWM	IP56




Specifications

Model	#Bearing Type	Rated Voltage	Operating Voltage	Current	Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	B	VDC	VDC	Amp	Watt	RPM	CFM	m ³ /min	Inch-H ₂ O	Pa	dB-A	g
DB05015B05H	B	5	3.5~5.5	0.45	2.25	5500	4.02	0.11	0.51	127.62	41.4	30.0
DB05015B05M	B	5	3.5~5.5	0.35	1.75	5000	3.61	0.10	0.40	99.59	38.0	30.0
DB05015B05L	B	5	3.5~5.5	0.25	1.25	4500	3.20	0.09	0.29	73.45	34.6	30.0
DB05015B12H	B	12	7.0~13.8	0.18	2.16	5500	4.02	0.11	0.51	127.62	41.4	30.0
DB05015B12M	B	12	7.0~13.8	0.15	1.80	5000	3.61	0.10	0.40	99.59	38.0	30.0
DB05015B12L	B	12	7.0~13.8	0.12	1.44	4500	3.20	0.09	0.29	73.45	34.6	30.0
DB05015B24H	B	24	14.0~27.6	0.10	2.40	5500	4.02	0.11	0.51	127.62	41.4	30.0
DB05015B24M	B	24	14.0~27.6	0.08	1.92	5000	3.61	0.10	0.40	99.59	38.0	30.0
DB05015B24L	B	24	14.0~27.6	0.06	1.44	4500	3.20	0.09	0.29	73.45	34.6	30.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

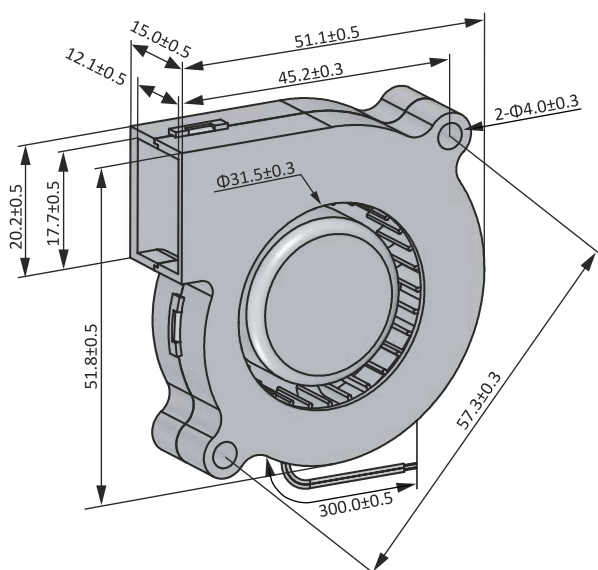

PQ Curve (At Rated Voltage)

