

9725-B

Φ 69x25 mm

General Specifications

Material	Expected Life	Temperature Range	Safety Standards	DC Fan Specials	IP Class
Frame: Plastic (UL94V-0) Impeller: Plastic (UL94V-0) Lead Wire: UL1007AWG#22 or Equivalent (+) Red, (-) Black	Ball Bearing 70,000hrs (40°C)	Operating Temperature -10°C~70°C (Non-condensing) Storage Temperature -40°C~70°C (Non-condensing)	NA	RD, FG, PWM	IP56




Specifications

Model	#Bearing Type	Rated Voltage	Operating Voltage	Current	Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	B	VDC	VDC	Amp	Watt	RPM	CFM	m ³ /min	Inch-H ₂ O	Pa	dB-A	g
DB09725B12UF	B	12	7.0 - 13.8 VDC	1.90A	22.80W	6.800 rpm	39.43	1.12	2.36	588.81	66.3	75.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

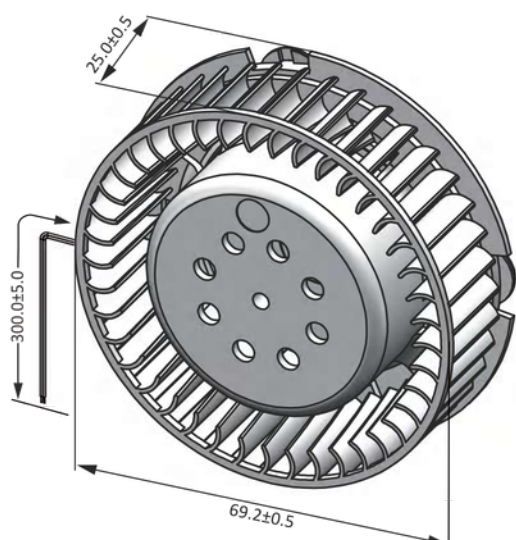

PQ Curve (At Rated Voltage)

