

**12032** 120x120x32MM



**General Specifications**


- ◆ Material..... Frame: Plastic (UL94V-0)  
Impeller: Plastic (UL94V-0)  
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)  
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)  
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, IP56

**Specifications**

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m <sup>3</sup> /min	Inch-H <sub>2</sub> O	Pa	dB-A	g
DB12032#12H	F01	B.S	12	7.0~13.8	2.00	24.00	3500	38.06	1.08	1.42	353.97	56.1	278.0
DB12032#12M	F01	B.S	12	7.0~13.8	1.00	12.00	3000	32.62	0.92	1.04	260.06	53.1	278.0
DB12032#12L	F01	B.S	12	7.0~13.8	0.70	8.40	2500	26.31	0.75	0.63	157.74	47.6	278.0
DB12032#24H	F01	B.S	24	14.0~27.6	1.00	24.00	3500	38.06	1.08	1.42	353.97	56.1	278.0
DB12032#24M	F01	B.S	24	14.0~27.6	0.70	16.80	3000	32.62	0.92	1.04	260.06	53.1	278.0
DB12032#24L	F01	B.S	24	14.0~27.6	0.40	9.60	2500	26.31	0.75	0.63	157.74	47.6	278.0

All models could be customized on voltage or any other requirements to fit your need.

**Dimensions (Unit:mm)**

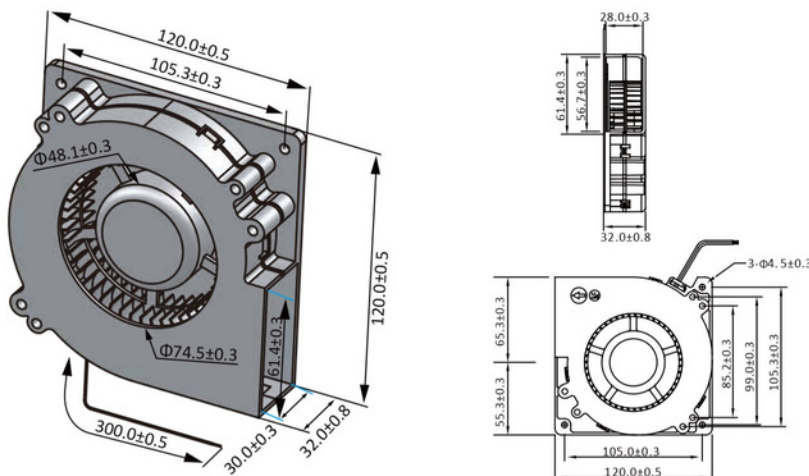

**PQ Curve (At Rated Voltage)**

