

4056-B

40x40x56MM

General Specifications

Material	Expected Life	Temperature Range	Safety Standards	DC Fan Specials	IP Class
Frame: Plastic (UL94V-0) Impeller: Plastic (UL94V-0) Lead Wire: UL1571AWG#28 or Equivalent (+) Red, (-) Black	Ball Bearing 70,000hrs (40°C)	Operating Temperature -10°C~70°C (Non- condensing) Storage Temperature -40°C~70°C (Non- condensing)	UL, TUV, CE	RD, FG, PWM	IP56




Specifications

Model	#Bearing Type	Rated Voltage	Operating Voltage	Current	Power	Speed	Max Air Flow	Max Static Pressure	Noise	Weight
Part No.	B	VDC	VDC	Amp	Watt	Inlet Outlet RPM	CFM m ³ /min	Inch-H 2O	dB-A	g
DF04056B12UG	B	12VDC	8.0-13.8 VDC	3.10A	37.20W	32.000 28.000	39.88 CFM 1.13m ³	8.40	74.0	101.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

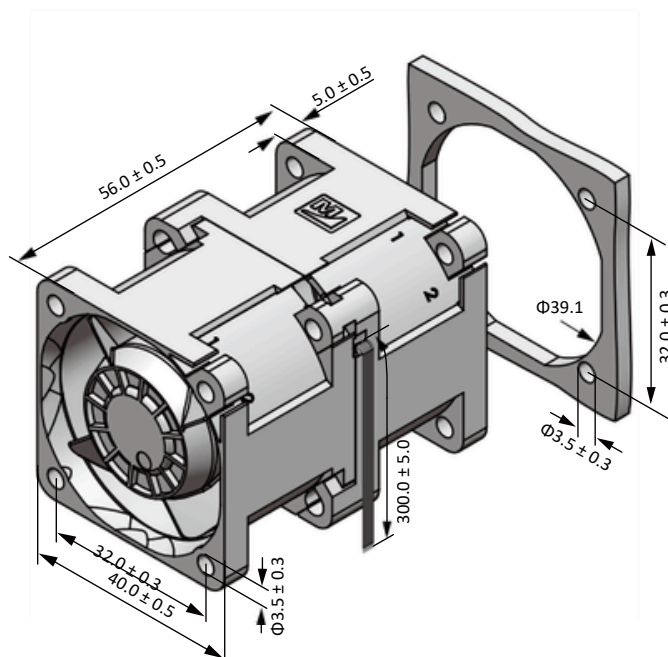

PQ Curve (At Rated Voltage)

