

20060A-B

200x200x60MM

General Specifications

Material	Expected Life	Temperature Range	Safety Standards	DC Fan Specials	IP Class
Frame: Aluminum Alloy, Painted black Impeller: Plastic (UL94V-0) Lead Wire: UL1007AWG#22 or Equivalent (+) Red, (-) Black	Ball Bearing 70,000hrs (40°C)	Operating Temperature -10°C~70°C (Non-condensing) Storage Temperature -40°C~70°C (Non-condensing)	NA	RD, FG, PWM	IP56




Specifications

Model	#Bearing Type	Rated Voltage	Operating Voltage	Current	Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	B	VDC	VDC	Amp	Watt	RPM	CFM	m ³ /min	Inch-H ₂ O	Pa	dB-A	g
DZ20060B24U	B	24	14.0~27.6	5.70	136.80	6000	781.45	22.13	2.91	723.58	72.9	1065.0
DZ20060B24H	B	24	14.0~27.6	3.50	84.00	5000	645.12	18.27	2.40	597.57	67.5	1065.0
DZ20060B24M	B	24	14.0~27.6	1.80	43.20	4000	509.17	14.42	1.81	451.64	61.9	1065.0
DZ20060B48U	B	48	28.0~56.0	3.00	144.00	6000	781.45	22.13	2.91	723.58	72.9	1065.0
DZ20060B48H	B	48	28.0~56.0	1.90	91.20	5000	645.12	18.27	2.40	597.57	67.5	1065.0
DZ20060B48M	B	48	28.0~56.0	0.90	43.20	4000	509.17	14.42	1.81	451.64	61.9	1065.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

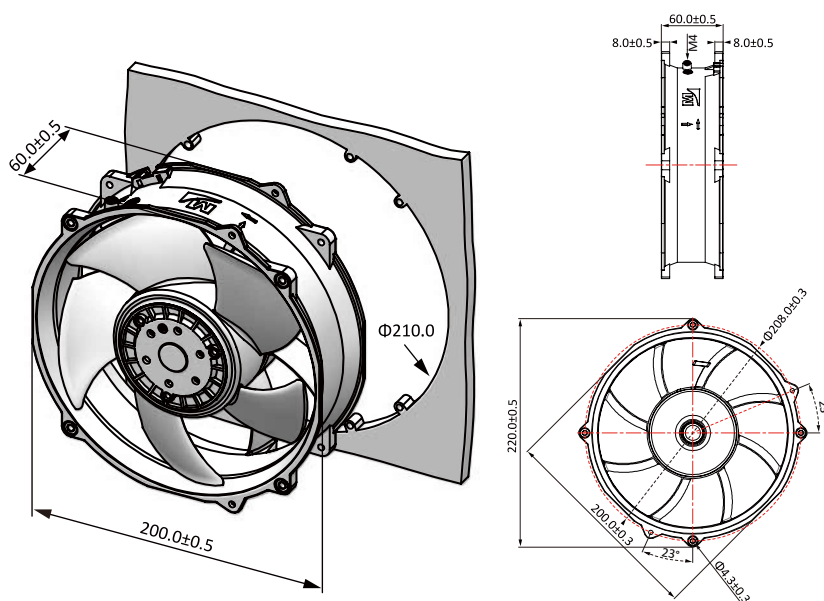

PQ Curve (At Rated Voltage)

